

Certify Sulfur and Monitor Critical Elements at Sub-ppm Levels



Sulfur Measurement Advanced

The Petra series delivers high-precision D4294 sulfur analysis across a broad measurement range. Petra MAX™ delivers D4294 sulfur analysis in addition to 12 elements from P to Zn, for rapid monitoring of critical elements like Ca, Fe, K, Ni, and V at sub-ppm levels.

Petra **MAX**
Elemental Analyzer for Petroleum

Petra **4294**
Sulfur Analyzer for Petroleum



TECHNICAL SPECIFICATIONS							
Petra MAX	Dynamic Range	Sulfur 5.7 mg/kg (ppm) – 10 wt%					
	Limit of Detection mg/kg (ppm) @ 600 s	Sulfur 5.7 mg/kg (ppm)					
		P	Cl	K	Ca	V	Cr
		17	3	0.7	0.4	0.1	0.09
	Mn	Fe	Co	Ni	Cu	Zn	
	0.07	0.07	0.07	0.04	0.1	0.1	
	Applications	Hydrocarbons, water and catalysts					
Petra 4294	Dynamic Range	Sulfur 2.6 mg/kg (ppm) – 10 wt%					
	Limit of Detection (ppm @ 600 s)	Sulfur 2.6 mg/kg (ppm)					
	Applications	Hydrocarbons, Water					

Petra is powered by High Definition X-ray Fluorescence (HDXRF®) technology: an elemental analysis technique offering significantly enhanced detection performance over traditional XRF technology.

Advanced Workflow

Petra Series Autosampler boasts a novel design with advanced software features for a more flexible and efficient workflow. Using unique identifier (X-ID) sample cups and an open-ended sample slide, the autosampler offers sample tracking and continuous sample loading. It is an optional add-on feature for a Petra 4294 or Petra MAX analyzer. QR/barcode scanner included with purchase.



X-ID
Sample Cup

ASTM D4294
ISO 8754 | IP 336

Analyze Sulfur with Precision and Flexibility

Easier to use than ever, Sindie R2 provides the best value and combination of detection limits, measurement speed, ease of use and reliability. Sindie R2 is the ideal sulfur analytical solution to help you stay in compliance with ASTM D2622, ASTM D7039, ISO 20884, and EN 16997 methods, enabling complete flexibility for your analytical needs.*

APPLICATIONS

- Petroleum products (diesel, jet, kerosene, other distillate oil, naphtha, residual oil, lubricating base oil, hydraulic oil, crude oil, gasoline, gasoline-ethanol blend, coal and petroleum cokes)
- First and second-generation biofuels (biodiesel, ethanol, renewable diesel, HVO, SAF)
- Oils (edible) and fats (UCO, Tallow, palm oil, corn oil, soybean oil, etc.)
- Chemicals (toluene, xylene, methanol, benzene, etc.)
- Water

FEATURES AND BENEFITS

- **LOD:** 0.4 mg/kg (ppm) at 300s, 0.28 mg/kg (ppm) at 600s**
- **Dynamic range:** 0.4 mg/kg (ppm) to 10 wt%
- Easy to use
 - Intuitive 10-inch touch screen
 - Just plug in and measure
 - **Measurement time:** 10-999 s
- Low and high range available:
 - **Low range:** 0.4 mg/kg (ppm) – 3000 mg/kg (ppm)
 - **High range:** 0.3 wt% - 10 wt%
- **Low maintenance:** no gasses, heating elements, columns, or quartz tubing
- Traditional 43 mm XRF sample cups or XOS Accucells –decided at time of order
- Small footprint
- LIMS integration for data management and transfer
- Custom sample presets to save data entry time and minimize data entry error on common samples
- Bar code reader autofills sample name to reduce data entry time
- Storage capacity for more than 50,000 measurement results
- Supports up to 30 calibration curves
- USB connectivity in front and back for connecting to printer, keyboard, mouse, and memory stick
- Supports USB and network printers
- Large, easy-to-remove side panels for easy serviceability
- Advanced error reporting and diagnostics



The R Series



ASTM D7039 , ASTM D2622,
ISO 20884, EN 16997

*All qualification herein are subject to user guide specifications. If you have further questions, reach out to our team of experts at info@xos.com.

**Longer cycle time increases counts and lower LOD, but sample conditions over time must be considered. For further inquiries, please contact us at info@xos.com.

Analyze Sulfur with Unparalleled Precision

Easier to use than ever, Sindie R3 is our most advanced sulfur analytical solution for compliance with ASTM D2622, ASTM D7039, ISO 20884, and EN 16997 methods, enabling complete flexibility for your analytical needs. Advanced R3 optics, provide extremely low limits of detection, allowing for cycle time flexibility to save up to hours per day in testing time.*

APPLICATIONS

- Petroleum products (diesel, jet, kerosene, other distillate oil, naphtha, residual oil, lubricating base oil, hydraulic oil, crude oil, gasoline, gasoline-ethanol blend, coal and petroleum cokes)
- First and second-generation biofuels (biodiesel, ethanol, renewable diesel, HVO, SAF)
- Oils (edible) and fats (UCO, Tallow, palm oil, corn oil, soybean oil, etc.)
- Chemicals (toluene, xylene, methanol, benzene, etc.)
- Water

FEATURES AND BENEFITS

- **LOD:** 0.18 mg/kg (ppm) at 300s, 0.15 mg/kg (ppm) at 600s**
- **Dynamic range:** 0.18 mg/kg (ppm) to 10 wt%
- Advanced R3 optics allow for optional lower background measurement time
- Easy to use
 - Intuitive 10-inch touch screen
 - Just plug in and measure
 - **Measurement time:** 10-999 s
- Low and high range available:
 - **Low range:** 0.18 mg/kg (ppm) – 3000 mg/kg (ppm)
 - **High range:** 0.3 wt% - 10 wt%
- **Low maintenance:** no gasses, heating elements, columns, or quartz tubing
- Traditional 43 mm XRF sample cups or XOS Accucells –decided at time of order
- Small footprint
- LIMS integration for data management and transfer
- Custom sample presets to save data entry time and minimize data entry error on common samples
- Bar code reader autofills sample name to reduce data entry time
- Storage capacity for more than 50,000 measurement results
- Supports up to 30 calibration curves
- USB connectivity in front and back for connecting to printer, keyboard, mouse, and memory stick
- Supports USB and network printers
- Large, easy-to-remove side panels for easy serviceability
- Advanced error reporting and diagnostics



The R Series



ASTM D7039 , ASTM D2622,
ISO 20884, EN 16997

*All qualification herein are subject to user guide specifications. If you have further questions, reach out to our team of experts at info@xos.com.

**Longer cycle time increases counts and lower LOD, but sample conditions over time must be considered. For further inquiries, please contact us at info@xos.com.

Sulfur Analysis with Compliance Flexibility

The Sindie® +Cl series complies with ASTM D2622, D7039, ISO 20884, ASTM D7536 and D4929 methods, enabling complete flexibility in sulfur and chlorine analysis.*

FEATURES AND BENEFITS

- Sulfur
 - **LOD:** 0.4 mg/kg (ppm) at 300 s, 0.28 mg/kg (ppm) at 600 s**
 - **Dynamic range:** 0.4 mg/kg (ppm) to 5 wt%
- Chlorine
 - **LOD:** 0.3 mg/kg (ppm) at 300 s, 0.21 mg/kg (ppm) at 600 s
 - **Dynamic range:** 0.3 mg/kg (ppm) to 3000 mg/kg (ppm)
- **Extremely low maintenance:** no gasses, heating elements, columns, or quartz tubing
- Automatic sulfur correction for chlorine
- Easy to use
 - Intuitive touch screen
 - Just plug-in and measure
 - Measurement time: 30-900 s
- Small footprint



ASTM D2622, D7039, D7536, D4929,
ISO 20884 | SH/T 0842

OPTIONS

- LIMS data output compatible software

Effective Online Analysis in Petroleum Process Streams

Sindie® Online is an industrial grade process sulfur analyzer with breakthrough detection capability to monitor ultra low sulfur in petroleum or aqueous process streams.*

FEATURES AND BENEFITS

- Uses ASTM D7039 technology
- ATEX Zone 1 and NEC Cl | Div 2 Certified
- **LOD:** 0.5 ppmw in hydrocarbon matrices @ 300 s**
- **LOD:** 1.5 ppmw in aqueous streams @ 300 s
- **Dynamic range:** 0.5 ppmw – 3000 ppmw
- For most application purposes, one calibration curve over full dynamic range
- Robust industrial design: wall mounted or standalone
- Continuous, real-time analysis
- Rapid response to sample change
- Easy to use with intuitive touch screen interface
- Direct measurement in ppm wt
- **Low maintenance:** no consumable liquids, gasses, combustion, or sample conversion
- Not sensitive to sample temperature changes



ATEX and NEC
Certified

OPTIONS


- Multi-stream analysis capability
- Extended Range (XR) available for measurements above 3000 ppmw up to weight percent levels
- Auto-validation capability

*All qualification herein are subject to user guide specifications. If you have further questions, reach out to our team of experts at info@xos.com.

**Longer cycle time increases counts and lower LOD, but sample conditions over time must be considered. For further inquiries, please contact us at info@xos.com.


Advanced Analysis with MWDXRF

Monochromatic Wavelength Dispersive X-ray Fluorescence (MWDXRF) utilizes state-of-the-art focusing and monochromating optics to increase excitation intensity and dramatically improve signal-to-background ratio compared to traditional WDXRF instruments. This enables significantly improved detection limits, precision, and a reduced sensitivity to matrix effects. A monochromatic and focused primary beam excites the sample and secondary characteristic fluorescence X-rays are emitted from the sample. A second monochromating optic selects the sulfur characteristic X-rays and directs these X-rays to the detector. MWDXRF is a direct measurement technique and does not require consumable gasses or sample conversion delivering robust and low-maintenance analyzers with dramatically lower detection limits and faster response times.

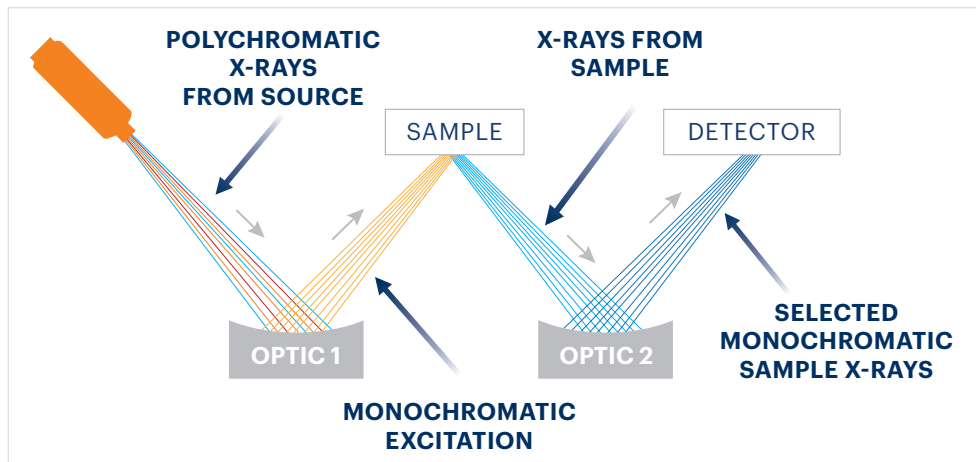

Autosampler available on Sindie M-Series 2622 and 7039

- 8 sample cell capacity
- Increases productivity
- Utilizes XOS Accucell sample cups

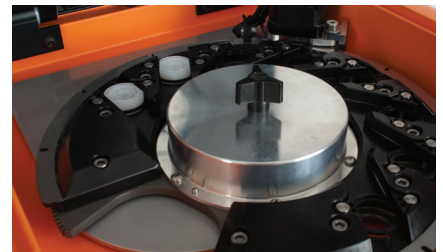

©XOS all rights reserved.
Petra MAX, Petra 4294 and Sindie are trademarks of XOS.

XOS[®]
better analysis counts

P.O. Box 1128
Granger, IN 46530

LSI Lazar Scientific, Inc.

574-271-7020
sales@lazarsci.com
www.lazarsci.com